

## Product

### Standard Range of Solenoid Valves

Poppet Type 5/2 Way Solenoid Valve

Connection: 1/4" BSP(F)

Orifice :6mm

Pressure: 2-10 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

#### Application:

For Double Acting Pneumatic Cylinders, Control Panels, Packaging Machinery, Pharmaceutical Machinery, Blow Moulding Machinery, Spot and Seam Welding Projection Welding Machinery, Pneumatic Actuators, Textile Machinery, Sugar Industry.



Poppet Type 4/2 Way, Manifold Mounted Solenoid Valve

Connection: 1/4" BSP

Orifice : 6mm

Pressure: 2-10 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

#### Application:

For Double Acting Pneumatic Cylinders, Control Panels, Packaging Machinery, Pharmaceutical Machinery, Blow Moulding Machinery, Spot and Seam Welding Projection Welding Machinery, Pneumatic Actuators, Textile Machinery, Sugar Industry.



## Poppet Type 4/2 Way Double Solenoid Valve

Connection: 1/4" BSP

Orifice : 6mm

Pressure: 2-10 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

### Application:

For Double Acting Pneumatic Cylinders,  
Control Panels, Packaging Machinery  
Pharmaceutical Machinery, Blow Moulding  
Machinery, Spot and Seam Welding Projection  
Welding Machinery, Pneumatic Actuators,  
Textile Machinery Sugar Industry.



## Poppet Type 5/3 Way, Centre Off Double Solenoid Valve

Connection: 1/4" BSP

Orifice : 6mm

Pressure: 2-10 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

### Application:

For Double Acting Pneumatic Cylinders,  
Control Panels, Packaging Machinery  
Pharmaceutical Machinery, Blow Moulding  
Machinery, Spot and Seam Welding Projection  
Welding Machinery, Pneumatic Actuators,  
Textile Machinery Sugar Industry.

## Poppet Type 5/2 Way Double Solenoid Valve with 'NAMUR' Mounting

Connection: NAMUR MOUNTING

Orifice : 6mm

Pressure: 2-10 Bar


Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

### Application:

For Pneumatic Actuators



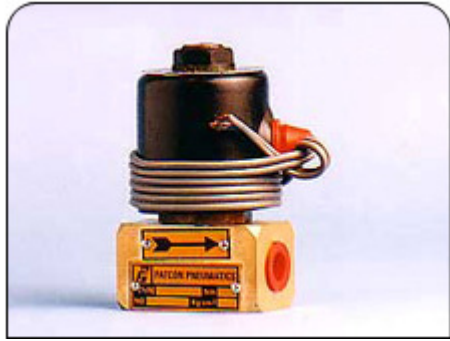

Direct Acting 2/2 Way NC, Solenoid Valve

Connection: 1/8" to 1/2" BSP/NPT

Orifice : 0.8 mm to 4 mm

Pressure: 0-40 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

**Application:**

TIG / MIG Welding Machinery, Sterlizers, Sugar Industry Boilers, Ovens, Furnaces, Water Treatment Plants, Vacuum Applications, Textile Machinery, Dentists Compressor, Medical Equipment.

Direct Acting 2/2 Way NC, Miniature Solenoid Valve

Connection: 1/8" & 1/4" BSP (F)

Orifice : 0.8 mm to 2.5 mm


Pressure: 0-20 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

**Application:**

TIG / MIG Welding Machinery, Sterlizers, Sugar Industry Boilers, Ovens, Furnaces, Water Treatment Plants, Vacuum Applications, Textile Machinery, Dentists Compressor, Medical Equipment.

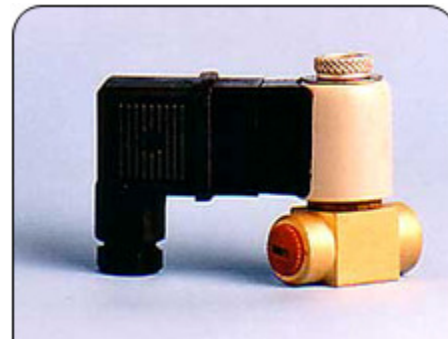

Direct Acting 3/2 Way NC, Miniature Solenoid Valve

Connection: 1/8" to 1/2" BSP/NPT

Orifice : 0.8 mm to 2.2 mm

Pressure: 0-40 Bar

Any Standard A/C D/C Voltage

MOC: Aluminium, Brass, SS

**Application:**

Boilers, Ovens, Furnaces, Water Treatment Plant, Air-Vacuum Applications, Textile Machinery, Dentists Compressor, Medical Equipments, Sterlizers, Control Valves.

